



BLUETOOTH SPEAKER

SP200-SL

OPAL BLUETOOTH SPEAKER

QUICK START GUIDE

PACKAGE CONTENTS

- OPAL Bluetooth Speaker
 - Micro USB Charging Cable
 - 3.5mm Audio Cable
 - User Guide
 - Thank You Card
-



PRODUCT FEATURES

- **aptX:** Stream high quality Bluetooth audio
 - **Built-in Microphone:** Take hands-free calls
 - **Up to 24hrs Battery Life:** All your favorite music – all day long
 - **TouchControl Backlight:** Easy to access in dark environments
 - **Line-in:** 3.5mm mini-plug to connect wired devices
 - **iOS Battery Meter:** Monitor speaker power status directly from your iOS device
-


SPECIFICATIONS

- | | |
|-----------------------------|--|
| - Bluetooth Standard | Version 4.0, Backward compatible with all versions |
| - Touch Control | Back Track, Next Track, Play/Pause, Vol-, Vol+, Bluetooth Pair |
| - Power | 6W |
| - Battery | 1000mAh / Play up to 24 hours |
| - Wireless Range | Up to 33 ft. / 10m |
| - Auxiliary Input | 3.5mm Audio-in |
| - Dimensions | 4.75" x 2.16" x 2.75" inch Width x Height x Depth |
| - Weight | 376g / 0.83lbs |
-

PRODUCT OVERVIEW

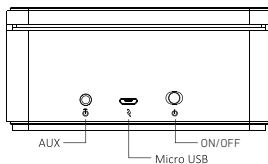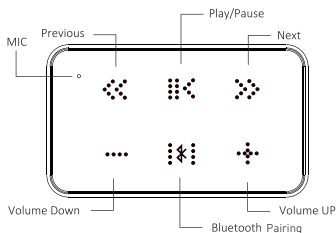

LINE-IN CONNECTION

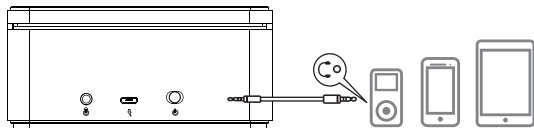

HOW TO PAIR WITH YOUR DEVICE

- Turn the power on. If this is the first time pairing, or if there are no devices paired, the speaker will automatically go into pairing mode as indicated by the LED flashing red and blue.
- To pair another device or to manually enter pairing mode, touch the [Bluetooth] icon once to activate the TouchControl panel.
The TouchControl panel is activated once the icons lights up.
Touch and hold the [Bluetooth] icon until the speaker enters pairing mode.
- Activate your Smartphone/device's Bluetooth function and search for devices.
- Once the Bluetooth Speaker has been detected, select the product name "OPAL" and it will automatically connect.
(For devices with Bluetooth versions below 3.0, please enter "0000" as the passkey/PIN to pair).
- Once successfully connected, the LED indicator will turn to a solid Blue.

USAGE TIPS

- The TouchControl panel is off by default to prevent accidental pressing. To turn it on, simply touch any of the control icons.
 - The backlight will light up, indicating the TouchControl is active.
 - If you turn off the OPAL Speaker but the Bluetooth on your Smartphone remains on, the connection will automatically reestablish once the speaker is turned back on.
 - If you turn off the Bluetooth on your Smartphone or go beyond the Bluetooth receiving range, the OPAL Speaker will disconnect and enter pairing mode.
 - aptX Codec will automatically activate if your Smartphone /Device supports aptX.
-

HOW TO RECHARGE

When the speaker's battery is low, the LED indicator will turn Red and flash.

- Plug the micro USB cable into the charging port of the speaker.
- Insert the other end of the USB connector into a powered USB port.
- The LED will light solid RED indicating it is charging.
- The Red LED will turn off once the speaker is fully charged.

LED INDICATOR

LED COLOR	DISPLAY	INDICATION
Blue/Red	Flashes Blue/Red Alternatively	Ready to Pair
Blue	Solidly Lit	Paired and Connected
Green	Solidly Lit	Aux/Line-in Mode
Red	Solidly Lit	Charging
	Flashing	Low Battery
	Off (while charging)	Battery Fully Charged

TAKING CALLS

- **Answering a call:** To answer a phone call, activate the TouchControl panel and tap the [PLAY/PAUSE] icon.
- **Ending a call:** Activate the TouchControl panel and tap the [PLAY/PAUSE] icon, or end directly from the phone.
- **Rejecting a call:** Activate the TouchControl panel, touch the [PLAY/PAUSE] icon for 3 seconds to reject the call.
- **Microphone:** Please talk no further than 8 inches away from the microphone.

FAQ

I have 2 devices paired to the Speaker. How do I switch between them?

The speaker will by default connect to the last connected device.

To manually disconnect, hold down the [Bluetooth] icon until the red/blue LED flashes continuously.

Next, go to the Bluetooth list on your other device and select "OPAL".

What is aptX?

aptX enables CD-like quality wireless audio by solving the problem of sending the full music bandwidth over Bluetooth. This is done by reducing the size of the audio files so they can be squeezed through the wireless pipeline without affecting the sound quality.

What devices support aptX?

Smartphones & Tablets: There are many Android based Smartphones and Tablets that supports aptX. Unfortunately Apple/iOS based Smartphones and Tablets does not currently support it. Please check with the manufacturer of your device or check out www.aptx.com for more information.

Mac: Mac computers with OS 10.6+ (Snow Leopard or newer) supports aptX. To verify, hold 'Alt' while clicking on the Bluetooth icon in the top menu bar. Next, choose "OPAL" device on the drop-down menu and the 'Active Codec' should show 'aptX'.

PC: PC's typically does not have native support for aptX. There are Bluetooth adapter with CSR Harmony software which will add aptX support to your PC, such as the Azio BTD-V401 Bluetooth adapter.

How do I take advantage of aptX?

To take full advantage of aptX high quality audio capabilities, we recommend using the best audio source available to you. In general, MP3's encoded at 320 kbps or AAC encoded at 256kbps (iTunes) will work great. As for streaming music, we recommend going with a premium service provider that streams at 320 kbps bitrate such as Spotify, Beats Music, Google Play, and Sony Music.

Can I charge the speaker while playing music?

Yes.

Why is the volume so low?

If the speaker volume is already maxed out, please check the volume setting on the device streaming to the speaker.

Why do I always have to tap the control icons twice?

This is to prevent accidental pressing since the controls are touch sensitive. The first tap will activate the TouchControl panel, as indicated by the icons lighting up. The control icons will work whenever they are lit.

SUPPORT

If you need assistance with this product, please visit our website at www.aziocorp.com for frequently asked questions and troubleshooting tips. Alternatively, please contact our dedicated customer care team.

There are several ways to reach us:

North America

By Phone: (866) 468-1198

By eMail: support@aziocorp.com

On Live Help: www.aziocorp.com

International

By eMail: support@aziocorp.com

1 YEAR LIMITED WARRANTY

AZiO Corporation warrants only to the original purchaser of this product, when purchased from an AZiO-authorized reseller or distributor, that this product will be free from defects in material and workmanship under normal use and service for one year after purchase.

AZiO reserves the right, before having any obligation under this warranty, to inspect the damaged AZiO product. Initial shipping costs of sending the AZiO product to the AZiO service center in Los Angeles, California, for inspection shall be borne solely by the purchaser. In order to keep this warranty in effect, the product must not have been mishandled or misused in any way.

This warranty does not cover any damage due to accidents, misuse, abuse or negligence. Please retain the dated sales receipt as evidence of the original purchaser & date of purchase. You will need it for any warranty service. In order to claim under this warranty, purchaser must make claim to AZiO and obtain an RMA # which is to be used within 15 days of issuance and must present acceptable proof of original ownership (such as original receipt) for the product. AZiO, at its option, shall repair or replace the defective unit covered by this warranty. This warranty is non-transferable and does not apply to any purchaser who bought the product from a reseller or distributor not authorized by AZiO, including but not limited to purchases from internet auction sites. This warranty does not affect any other legal rights you may have by operation of law. Contact AZiO through email, chat, or through one of the technical support numbers listed for warranty service procedures.
