

FOQO

WIRELESS BACKLIT MECHANICAL KEYBOARD

USER GUIDE

ENGLISH

AZIO_FOQO_AM_UG_V01

SUPPORT & WARRANTY

Here's How to Reach Us

By phone: 866.468.1198
By email: support@aziocorp.com
On FB: www.facebook.com/aziocorp



Multilingual instruction guide is available for download at www.aziocorp.com > Support > Keyboards > FOQO Keyboard

AZIO Corporation warrants only to the original purchaser of this product, when purchased from an AZIO authorized reseller or distributor, that this product will be free from defects in material and workmanship under normal use and service for the length of the warranty period after purchase. AZIO reserves the right, before having any obligation under this warranty, to inspect the damaged AZIO product. Initial shipping costs of sending the AZIO product to the AZIO service center in Los Angeles, California, for inspection shall be borne solely by the purchaser. In order to keep this warranty in effect, the product must not have been mishandled or misused in any way.

This warranty does not cover any damage due to accidents, misuse, abuse or negligence. Please retain the dated sales receipt as evidence of the original purchaser & date of purchase. You will need it for any warranty services. In order to claim under this warranty, purchaser must contact AZIO and obtain an RMA # which is to be used within 15 days of issuance and must present acceptable proof of original ownership (such as original receipt) for the product. AZIO, at its discretion, shall repair or replace the defective unit covered by this warranty. This warranty is non-transferable and does not apply to any purchaser who bought the product from a reseller or distributor not authorized by AZIO, including but not limited to purchases from internet auction sites. This warranty does not affect any other legal rights you may have by operation of the law. Please contact AZIO through email, chat, or one of the technical support numbers listed for warranty service procedures.

No AZIO supplier, dealer, agent, or employee is authorized to alter or extend the terms of this Limited Warranty or to make any representation whatsoever. AZIO reserves the right to amend the terms of this Limited Warranty at any time without notice.

HELP RESOURCES

Before lodging a claim on the Limited Warranty, please review the online help resources at aziocorp.com/support. If the product is still not functioning properly after making use of these resources, please contact AZIO through aziocorp.com/support or your authorized distributor or dealer. You may be required to assist with the diagnosis process to verify and ascertain any issues which you may be facing with the product. Service options, parts availability, and response times may vary depending on the country in which the Limited Warranty claim is lodged.

SAFETY WARNING & CERTIFICATION

FCC STATEMENT

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

BATTERY WARNING

THE AZIO FOQO keyboard contains a Li-ion rechargeable battery. The general life expectancy of the batteries used are based on actual usage. If you suspect the battery's contained power is low, please use the included USB connection cable to recharge the battery.

Caution:
Please do not open, manipulate, or expose to conducting materials (metal), moisture, liquid, fire, or heat. Conducting any of above action may cause batteries to leak or explode, resulting in personal injury.

Please do not leave the rechargeable battery discharged or unused for extended period, which might affect the life usage of the battery.

CA PROP 65 WARNING

This product contains chemicals known to the state of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

CE STATEMENT OF COMPLIANCE WITH EU DIRECTIVE

AZIO CORPORATION declares that the AZIO FOQO Keyboard is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

The full Declaration of Conformity can be requested via the following:

Company: AZIO CORPORATION
Address: 19933 Harrison Ave, City of Industry, California 91789
E-mail: support@aziocorp.com

WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT INFORMATION

Correct Disposal of This Product (Waste Electrical & Electronic Equipment)
(Applicable in the European Union and other European countries with separate collection systems)
This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

IMPORTANT PRODUCT INFORMATION GUIDE

SAFETY GUIDELINES

In order to have maximum safety while using AZIO FOQO, we strongly suggest that you adopt the following guidelines:

- Should you have trouble operating the device properly and troubleshooting does not work, please unplug the device and contact the AZIO support or go to www.aziocorp.com for support. Do not attempt to service or fix the device yourself at any time.
- Do not disassemble the device (doing so will void your warranty) and do not attempt to operate it under abnormal current loads.
- Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and / or switch off the device in order to let the temperature stabilize to an optimal level.

COMFORT

Research has shown that long periods of repetitive motion, improper positioning of your computer peripherals, incorrect body position, and poor habits may be associated with physical discomfort and injury to nerves, tendons, and muscles. Below are some guidelines to avoid injury and ensure optimum comfort while using your AZIO FOQO.

- Position your keyboard and monitor directly in front of you with your mouse next to it. Place your elbows next to your side, not too far away and your keyboard within easy reach.
- Adjust the height of your chair and table so that the keyboard and mouse are at or below elbow height.
- Keep your feet well supported, posture straight and your shoulders relaxed.
- During usage, relax your wrist and keep it straight. If you do the same tasks with your hands repeatedly, try not to bend, extend or twist your hands for long periods.
- Do not rest your wrists on hard surfaces for long periods. Use a wrist rest to support your wrist while gaming.
- Customize the keys on your keyboard to suit your style of usage in order to minimize repetitive or awkward motions.
- Do not sit in the same position all day. Get up, step away from your desk and do exercises to stretch your arms, shoulders, neck and legs.
- If you should experience any physical discomfort while using your keyboard, such as pain, numbness, or tingling in your hands, wrists, elbows, shoulders, neck or back, please consult a qualified medical doctor immediately.

MAINTENANCE & USE

For the metal and plastic parts of the keyboard, once a month we recommend you unplug the device from the computer and clean it using a soft cloth or cotton swab with a bit of warm water to prevent dirt buildup. Please do not use soap or harsh cleaning agents. Remember to dry off any left over moisture on the metal parts of the keyboard.

We are dedicated to provide our products with premium materials and present them in the best condition, but it also needs love and caring to keep it at optimum.

HOW TO MAKE A LIMITED WARRANTY CLAIM

If you purchased the product from an AZIO reseller, please contact the AZIO reseller in regards to your Limited Warranty claim. If you are unable to return the product to the AZIO reseller for whatever reason, or if you have purchased the product directly from AZIO at aziocorp.com, then please follow the steps below:

- Email support@aziocorp.com to obtain a Return Merchandise Authorization Number ("RMA Number").
- Note the RMA Number in a visible place on the in the shipping box or write it on the shipping box.
- Enclose a Valid Proof of Purchase inside the product's package. Please visit aziocorp.com/warranty for examples of a Valid Proof of Purchase.
- Send the product to the following address:
AZIO RMA
19933 Harrison Ave,
City of Industry, California 91789

Do not send AZIO any product without a valid RMA Number.

We advise that you select a method of shipping that is traceable (e.g. UPS, DHL FedEx). Any expense of claiming under this Limited Warranty will be borne by the person making the claim (including any shipping and handling charges in returning the product to AZIO, as well as any applicable customs, duties or taxes in relation to the claim). If the product is validly returned under the terms of this Limited Warranty, AZIO will be responsible for postage expenses for shipping the product back to you (but not any customs charges, duties, or taxes). You are responsible for ensuring that the product is properly packaged and will bear the full risk of loss or damage for any product that is returned improperly packaged. Risk of loss or damage in the returned product only passes to AZIO when the product is received by AZIO and AZIO shall not be responsible for items lost in transit to our address. In the event that the procedure herein is not followed, AZIO reserves the right to accept the delivery of the product on such terms that it may determine at its sole discretion.

Returns Not Covered by this Limited Warranty.



If AZIO receives a product from the purchaser that does not meet the requirements of this Limited Warranty, including (but not limited to) a product that (a) lacks a valid RMA Number, (b) is not accompanied by a valid Proof of Purchase, (c) is no longer covered under the Warranty Period, or (d) does not have a defect covered by this Limited Warranty, you may be responsible for an assessment fee, return shipping and handling fees, and other reasonable fees as may be required by AZIO prior to the product being returned to you.

General.

This Limited Warranty applies only to the original purchaser of the product and is non-transferable. No AZIO reseller, agent, distributor, or employee is authorized to make any modification, extension or addition to this held to be illegal or unenforceable the legality or enforceability of the remaining terms shall not be affected or impaired.

PACKAGE CONTENTS & SPECS

PACKAGE CONTENTS

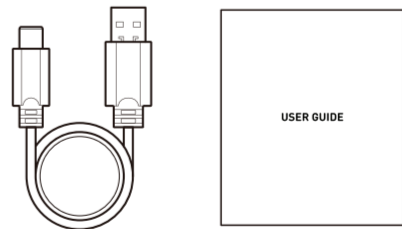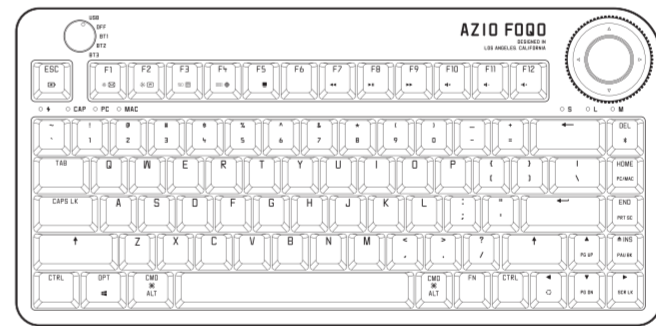

SPECIFICATIONS

Interface	Bluetooth + USB Hybrid
Switch Type	Gateron Switches
Backlight	9 LED Colors / 4 RGB Light Modes
N-Key Rollover	6kRO via BT / NKRO via USB
Battery	5000 mAh Li-ion
Charging Connection	USB Type-C Cable
Dimens. (LxWxH)	320 x 158 x 48.5 mm
Weight	2.9 lbs / 1300 g
System Requirements	Windows 10 & above / macOS USB Port or Bluetooth
Package Contents	FOQO Wireless Backlit Mechanical Keyboard USB Type-C Cable User Guide

KEYBOARD SETUP

Keyboard Mode Switch Knob

The AZIO F0Q0 Keyboard is a versatile keyboard that supports Mac and PC and can be connected wirelessly via Bluetooth or wired via USB. The interface mode switches are located on the knob located on the top left of the keyboard. (Fg 01)

Fig. 01 / Keyboard Mode Switch

USB : In USB mode, please connect the included USB Type-C cable to the keyboard and your computer. While in USB mode, the keyboard will automatically begin charging and the backlight will turn on.

OFF : In OFF mode, all circuitry is off. This is ideal when the keyboard will not be used for an extended duration of time. Please note that the keyboard can be charged while in OFF mode.

BT : In BT mode, you may connect the keyboard to your computer wirelessly. While in Bluetooth mode, the backlight will automatically turn on. After 60 minutes of inactivity, the keyboard will hibernate, simply press any key to wake up and reconnect automatically.

Setup for PC / MAC

Press the **FN + HM** keys to set the keyboard into PC or Mac mode. The keyboard is on Mac mode by default and will remain in the last used setting after setup. The **Keyboard Layout Mode Indicator Light (Fg 02)** will light up according to the selected layout choice.

Indicator shows that the keyboard is in **PC mode**.

Indicator shows that the keyboard is in **MAC mode**.

Pairing the Keyboard In Bluetooth Mode

Step.1 Switch the keyboard to **BT Mode**. Choose BT1, BT2, or BT3 to set up a profile; the keyboard will automatically go into **Pairing Mode** for 5 minutes until a connection is successfully established if the keyboard has never connected to a device before. The **DEL key light** will blink slowly indicating it is in **Pairing Mode**.

Step.2 To manually setup the keyboard in **Pairing Mode**, hold down the **FN** key and the **DEL** key for a few seconds until the **DEL key light** blinks slowly. The keyboard is now in **Pairing Mode**.

Step.3 On your Mac, navigate to **'System Preferences'** and select 'Keyboard'. Next, click on 'Set Up Bluetooth Keyboard'. For Windows 10, go to 'Bluetooth Settings' and select 'Add Bluetooth or other device'. Once the setup wizard finds **'AZIO-F0Q0'**, click on 'Pair'. Once pairing is successfully completed, the keyboard backlight will stop flashing. The keyboard is now ready for use.

Multiple Bluetooth Profiles Setting


Fig. / Bluetooth Profile Modes

The AZIO F0Q0 Keyboard supports up to **3 Bluetooth Devices** simultaneously. Use the Mode Switch knob to change the mode to the desired bluetooth profile: **BT1, BT2, or BT3**. Please follow the previous instructions to pair with other devices.

Once a Bluetooth Profile is selected, the **DEL key** will light up for a few seconds indicating that the device is attempting a connection. If successfully connected to a device that has been setup, the **PC/Mac Mode Indicator Lights (Fg 02)** and the **Control Knob Indicator Lights (Fg 03)** will be lit up in a specific mode. If no connection is found, the indicator lights will be off. You may operate one device at a time and please allow 1-3 seconds when switching between different Bluetooth profiles.

Connecting the Keyboard through USB Connection

To connect via USB port, please use the **Type-C Cable** included in the package. Please connect the cable to the **Keyboard USB Port (Fg 04)** and to your computer. When connection is successfully established, the keyboard will light up and be ready for use.

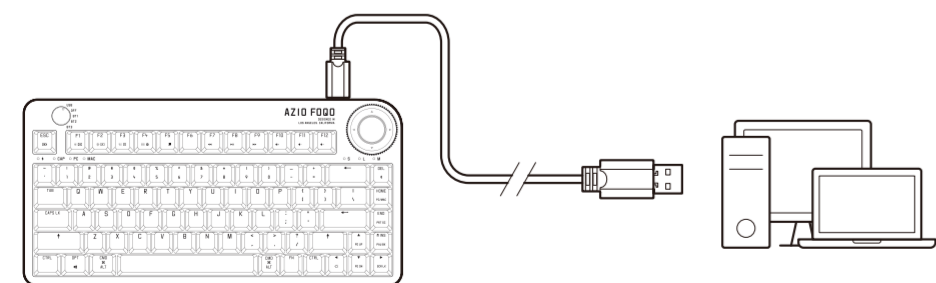

KEYBOARD DIAGRAM

Hot Keys Legend

F1 MAC / Decrease Display Brightness PC / Launch Email Application	F2 MAC / Increase Display Brightness PC / Launch Media Player	F3 MAC / Launch Expose PC / Launch Calculator	F4 MAC / Launch Dashboard PC / Launch Web Browser	F5 MAC / None PC / Launch My Computer	F6 MAC / None PC / None
F7 MAC / Previous Track PC / None	F8 MAC / Play / Pause PC / None	F9 MAC / Next Track PC / None	F10 MAC / Mute Volume PC / None	F11 MAC / Decrease Volume PC / None	F12 MAC / Increase Volume PC / None

CONTROL KNOB / SOUND & LIGHT

Using the Control Knob to Adjust Multimedia & Lighting

By default, the control knob will start in Multimedia mode, as indicated by the lights below the knob labeled "S" for Multimedia, "L" for Lighting Control and "M" for Macro Key. To change modes, **hold down the FN key** and press the **Left Arrow** key to cycle to the desired mode. The selected mode will be lit up in white.

Multimedia Settings

- Turn the control knob **clockwise** to increase the sound volume.
- Turn the control knob **counter-clockwise** to decrease the sound volume.
- Press the **center button** on the control knob to mute the sound. Press the **top arrow button** to play or pause the current media. Press the **bottom arrow button** to stop the current media. Press the **left arrow button** to play the previous media. Press the **right arrow button** to play the next media.

Backlight Settings

- Turn the control knob **clockwise** to increase the backlight brightness.
- Turn the control knob **counter-clockwise** to decrease the backlight brightness.
- Press the **center button** on the control knob to turn the backlight ON / OFF. Press the **top arrow button** or **bottom arrow button** to cycle through the backlight colors: White (default), Red, Orange, Yellow, Green, Blue, Purple, Sky Blue, & RGB. Press the **left arrow button** or **right arrow button** to cycle between 4 lighting modes: **Static, Breathing, Wave & Reactive**.

CONTROL KNOB / MACRO

Programming Macros with the Control Knob

Step.1 Switch the keyboard to **Macro Mode** by holding down **FN + Left Arrow**. The indicator light will light up on "M" when you are in the macro setting.

Step.2 Press **FN + Center / Up / Down / Left or Right** arrow button on the control knob to begin the macro recording session. Whichever button you've pressed will be where the keyboard saves the macro commands. You may save up to 5 separate macros on each button. The arrow buttons on the knob will **flash slowly** showing that it is now recording.

Step.3 Type in your command that you'd like to save as a macro. You may type in a **single function key**, a **combination function key** such as 'Ctrl + C', or a **combination of alphabet, number, and symbols** up to 10 characters. If nothing is entered within 15 seconds, the keyboard will exit the macro recording session without saving any settings.

Step.4 After typing in your command, **press any button** on the control knob to exit with the saved macro setting. The arrow buttons on the knob will **stop flashing** to show that it is no longer recording. To use the macro anytime, simply press the button on the control knob that you saved the macro onto and it should replicate the command.

KEYBOARD BATTERY

Checking the Battery Level

To check the battery power level of the keyboard, press the **FN** key and **ESC** key. The **F1 to F10** key LEDs will flash, with each key indicating 10% of total power. White light will flash if the power is above 20% and red light will flash when the power is below 20%. If all 10 keys light up, this indicates that the keyboard battery is full. (Fg 05)

F1 to F10 : Each key indicates 10% of total power. Press **FN+ESC** key to activate power level LED.

Charging the Keyboard

When the battery level is **less than 20%**, the **Power Indicator Light (Fg 06)** will start **blinking in red**. Insert the included USB cable into the keyboard and plug the other end to a USB port or a USB charger. When plugged in, the indicator light will stop blinking and stay a **static red**, indicating that the keyboard is charging. Once fully charged, the indicator light will be off. Charging a completely drained battery to full on a USB 3.0 port will take around **4-6 hours** due to its large power capacity. Actual charging time may vary depending on the power output of the charging source. The keyboard can be charged in any mode - **BT, USB, or OFF** mode.

Fig. 06 / Power Indicator Light

- Blinking Red light > Battery Low Power (<20%)
- Steady Red light > Battery Charging
- Light Off > Battery Fully Charged